

# DRY-BREAK™ 2-INCH

Emco Wheaton DRY-BREAK™ Couplers and Adapters are used anywhere spill-free fluid transfer is required.

## COUPLER



- Cannot be opened until connected to adapter or disconnected until lever is moved to closed position thus eliminating accidental spillage
- Product loss on disconnect virtually eliminated
- Stainless version available with straight ball-bearing swivel for kink-free hose connection
- Aluminum version available with straight or 90° integrated ball-bearing swivel for kink-free hose connection
- Easily serviced in the field using the Emco Wheaton Repair Kit Program
- Mates with all existing Emco Wheaton 1.5" and 2" inlet adapters
- Also available in unique 4-notch pattern



## ADAPTER



- Enhanced poppet design allows for better flow characteristics in either direction
- Rear-entry design allows for easy field servicing
- One-piece poppet means fewer components for service
- Mates with all existing Emco Wheaton 1.5" and 2" inlet couplers
- Also available in unique 4-notch pattern



[www.emcowheaton.com](http://www.emcowheaton.com)

 @EmcoWheaton |  [www.facebook.com/EmcoWheaton](http://www.facebook.com/EmcoWheaton)

## ACCESSORIES

Dust Cap for Adapter





Adapter Opener



Dust Plug for Coupler



## TECHNICAL SPECIFICATIONS

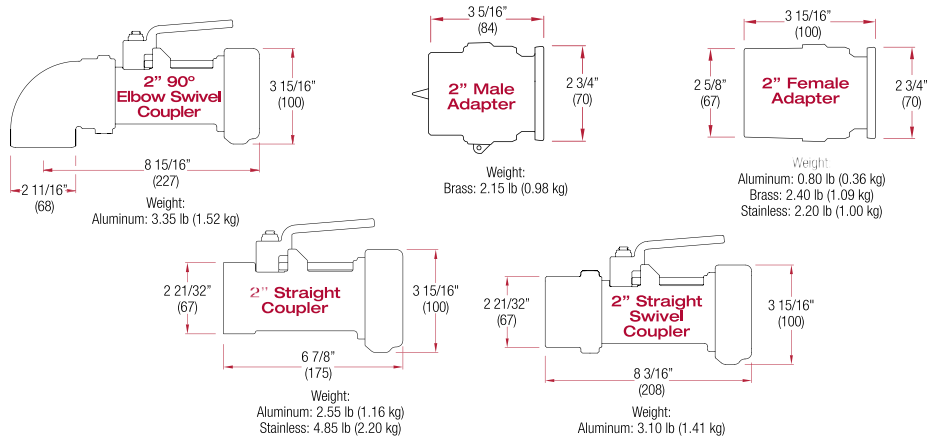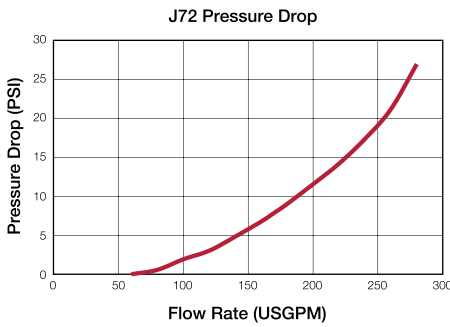

Maximum Working Pressure: 85 psi

## TO ORDER 2-INCH PRODUCTS

**J 7 2 C - S V N 0 - B 0 0 1**

Type	Body Material	Seals	Inlet	Swivel	Rev.	Special Features
C=Coupler	A=Aluminum	V=Viton	N=Female NPT	0=Straight (No Swivel)	A	001=90° Handle
A=Adapter	B=Brass	B=Buna	M=Male NPT	1=Straight with Swivel	B	002=SST Trim
	S=Stainless Steel	P=Perfluoroelastomer (Chemraz)	I=ISO 228 Parallel	2=90° with Swivel	C	003=Selective (3-pin)
					D	004=with dust cap
					etc.	008=Selective (2-pin)
						010=4-Notch Version

Note: for 1.5" inlet, use J79 instead of J72.  
CRN available for all provinces and territories.

Perfluoroelastomer (Chemraz): -20°F to 450°F (-29°C to 232°C)  
Buna: -40°F to 225°F (-40°C to 107°C)  
Viton: 5°F to 225°F (-15°C to 204°C)